

BERLUTO Float valve Type: 8730 Brass External thread (BSPP)



Characteristics

Series: SV 94 MS
Type: 8730
Housing material: Brass
Connection: External thread (BSPP)
Connection 2: Internal thread (BSPP)
Pressure rating: PN12
Sealing: NBR
Material floating rod: Brass
Minimum medium temperature (continuous): 0 °C
Maximum medium temperature (continuous): 100 °C

Application

- Water
- Neutral liquids
- Level control of water supply tanks, small tanks, reservoirs, poultry drinking troughs, humidification systems, pond systems, steam generation systems.

Technical Information


- Adjustable float ball position.
- Float ball in copper or plastic.

Options

- Float rod with special length on request.

Size table:

| G | G1 | L mm | L1 mm |
|-----------|-----------|---------|----------|
| 1/2" [15] | 1/2" [15] | 329 | 40 |
| 3/8" [10] | 3/8" [10] | 329 | 32 |

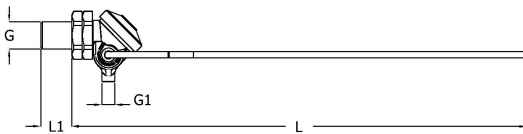

| Nominal inner diameter | Nominal inner diameter 2 | With float | Float diameter mm | Float material | Kv value m³/h | Article |
|------------------------|--------------------------|------------|----------------------|----------------|------------------|----------|
| 1/2" [15] | 1/2" [15] | Yes | 90 | Plastic | 0.3 | 14684484 |
| 1/2" [15] | 1/2" [15] | No | | | 0.3 | 14683594 |
| 1/2" [15] | 1/2" [15] | Yes | 96 | Copper | 0.3 | 14684439 |
| 3/8" [10] | 3/8" [10] | Yes | 96 | Copper | 0.2 | 14684438 |
| 3/8" [10] | 3/8" [10] | Yes | 90 | Plastic | 0.2 | 14684483 |
| 3/8" [10] | 3/8" [10] | No | | | 0.2 | 14683593 |

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.